

Continued

Configuration switches

The T3100 System Unit Configuration Switch is 6 pin Dual-In Line Package (DIP) switches.

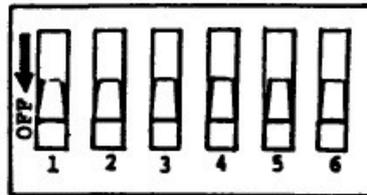


Figure 1-5 DIP switch

The meanings of all Configuration DIP Switch's settings are described in the following tables.

SW	DESCRIPTION
1	Switch over the North European Font ON North European Font OFF Normal
2	Changing the size of DRAM ON 512 KB OFF 640 KB
3	Switching over the external CRTC ON Disable internal CRTC OFF Enable internal CRTC
4	Changing the printer port ON For the port of input or output OFF For the printer port
7	Changing the font of Plasma Display ON For double dots OFF For single dot
6	Changing the port address of internal communication channel ON '2FA' OFF '3FA'